

TELESCOPIC FLOODLIGHTING MAST SYSTEM 6M


Ideal for horse arenas and maneges.

Specifications and Dimensions:

Retracted Height (A)	2600 mm
Extended Height	6000 mm
Dimension (B)	2405 mm
Dimension (C)	195 mm
Top Tube Diameter	2.50 "
Base Tube Diameter (D)	3.50 "
Number of Sections	3
3-Core Internal Cable	
Maximum Recommended Headload: 40 Kg	

Securing brackets clamp around posts of up to 100mm

TOP Flange :

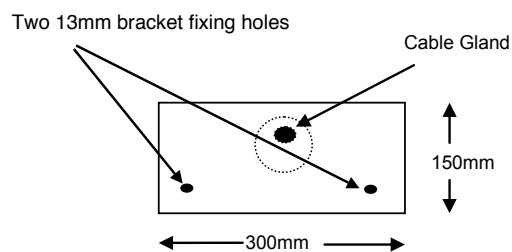

Materials:

Mast Sections: Heat treated aluminium alloy 6082 T6.

Castings: Die cast aluminium alloy LM6.

Finishes:

Base, Collars and Flange: Dark Green

Mast sections: Clear anodised.

Fittings: Zinc plated and passivated.

Operating Temperatures: +55°C to -40°C (dry).

Maximum Working Air Pressure: 25 psi.

